

Technical Data Sheet

Description: 2 by 18W Emergency Batten 1200mm (4ft) Wireguard

Product Code: EXEMBTT218WG

Features:

- High Output and energy saving LEDs with bright & efficient light distribution
- Long Life Lithium Iron Phosphate battery
- Battery - Voltage 3.2V / Capacity 3000mAh
- Easy surface mount
- Large terminal blocks for easy installation
- Long Life 50,000 LED Hours
- 3 hours runtime in emergency mode
- Automatic Self-Test Function to prolong Battery Life
- Designed and manufactured to AS/NZS 2293.3
- 3 years warranty (including battery)



Specifications

Power and Lamps

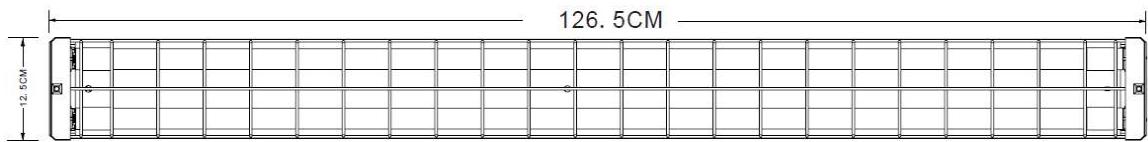
Input Voltage (V)	Frequency (Hz)	240V (50Hz)
Power Consumption (Mains / Emergency)		2*18W / 2*3W
Correlated Colour Temperature CCT (k)		6,000
Colour Rendering Index (CRI)		>80
Luminance (LM)		276
Lamp(s)		50,000 LED Hours
Operating Mode		Non-Maintained

Battery

Type	Lithium Iron Phosphate LiFePO ₄
Battery Voltage (V) / Capacity (mAh)	3.2V / 3000mAh
Battery Charging Time	20Hrs
Standby duration	3Hrs
Automatic Self-Test	Yes

Physical

IP Rating	IP20
Construction (body / guard)	Steel, Steel
Packaging Dimensions (L x H x W)	1260mm x 140mm x 105mm
Packaging Weight (single / pack)	4kg / 16.5kg (4 pcs)
Installation	Surface mount
Operating Temperature	1°C to 40°C
Maximum Ambient Temperature	45°C

**Conformance**

C0	D12.5
C90	D12.5
Designed & Manufactured to	AS/NZS 2293.3

Spacing Table**NATA Classification****Mounting Height (m)****D12.5 (m)**

2.1 2.4 2.7 3.0 3.3 3.6 4.0 4.5 5.0

D12.5 (m)

7.7 7.9 8.0 8.1 8.1 8.1 7.9 7.6 7.2

7.7 7.9 8.0 8.1 8.1 8.1 7.9 7.6 7.2

Accessories**Product Code**

Battery

MBTTBATTERY

Wireguard

218WGDIFF

Driver Tube

218TUBEDR

Normal Tube

218TUBE

Compatible parts

N/A

Warranty

Products have 3 years (from date of purchase) replacement warranty including battery. Products must be connected to permanent live power otherwise warranty will be void. Must be installed by a licensed electrician.

This warranty does not cover loss or damage by misuse, incorrect installation, incorrect voltage or non-authorized electrical connections, or adverse external conditions (such as power surges and dips, exposure to heat, corrosion etc).

Products that have been altered in any way or used other than in accordance with instruction are not covered by this warranty.

End Technical Data Sheet

Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.